




Fig. 2 Rope Used To Temporarily Place A Disconnect Switch Back Into Service.

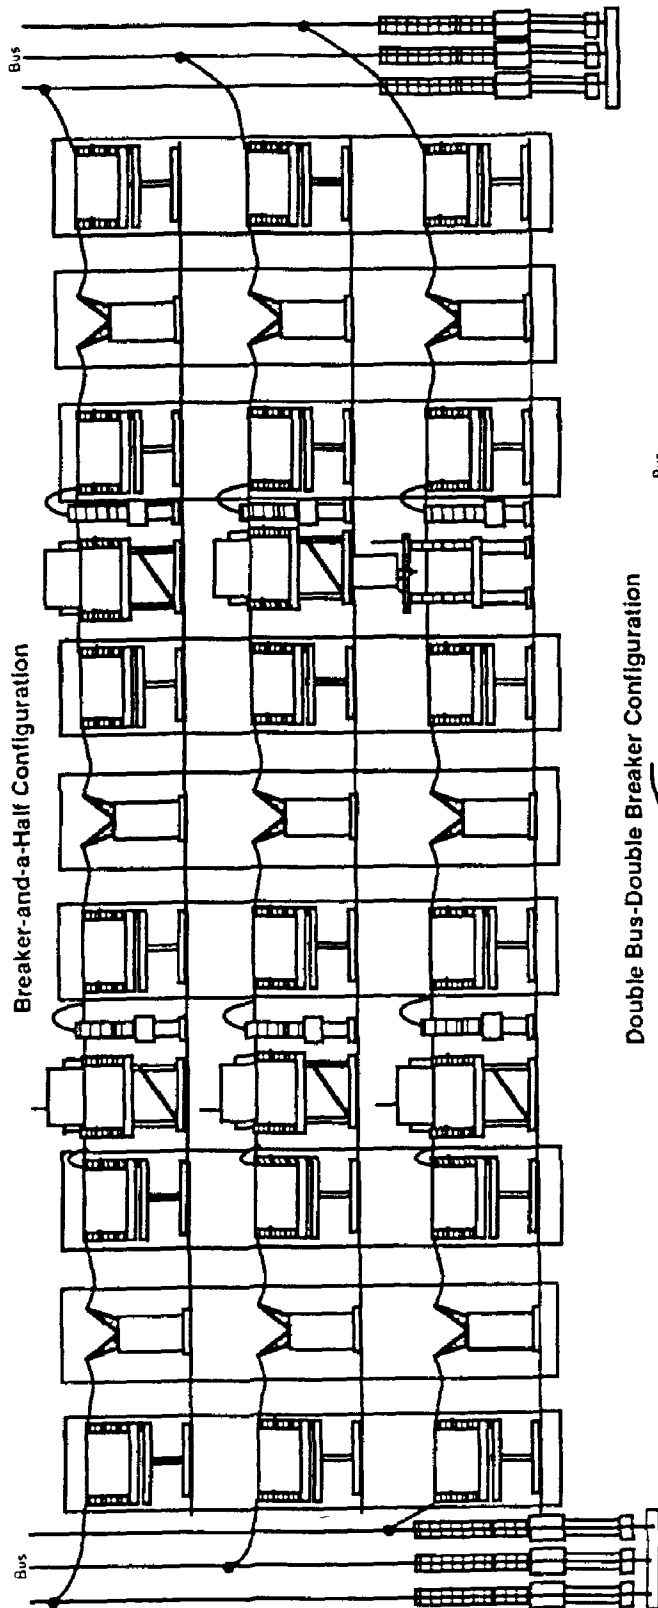

Double Bus-Double Breaker Configuration

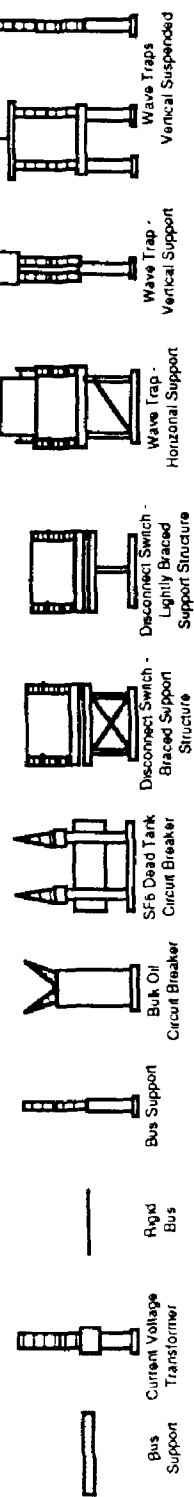
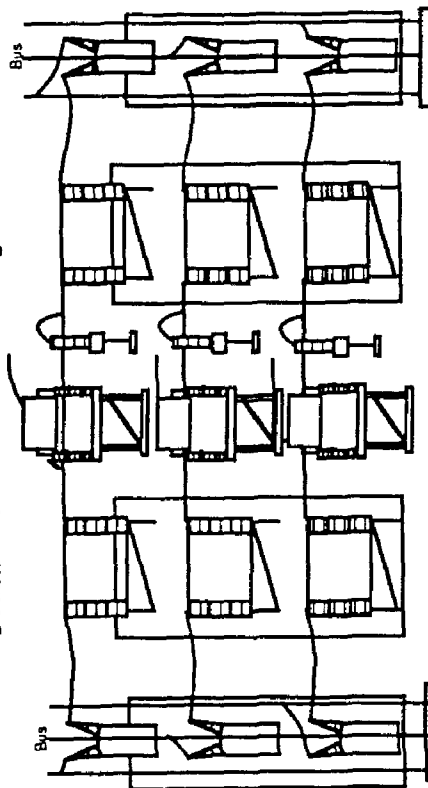


Fig. 3 Schematic Diagrams of Common Switchyard Equipment Configurations.