

Seismic Zonation for COLM Dykes

John P. Sully¹, Enrique Gajardo¹, Juan Murria² and Jacinto Abi Saab²

1. INTEVEP, S.A.,
Apartado 76343,
Caracas 1070A, Venezuela
2. MARAVEN,
S.A., Apartado 173,
Lagunillas 4016A, Venezuela

Abstract

The methodology used for an initial seismic zonation is briefly introduced and then developed to provide details of a microzonation presently in progress for the Costa Oriental del lago Maracaibo coastal dyke protection system. The microzonation is focussed towards the evaluation of dynamic site response of selected representative soil profiles. The results of the study are to be applied for evaluation of seismic stability and deformation mechanisms for the coastal dyke system with a view to defining remedial measures for critical sections of the linear earth structure.

Introduction

In 1982, MARAVEN and INTEVEP commenced a program of studies to evaluate the reliability of the coastal protection system on the east coast of Lake Maracaibo (Costa Oriental del Lago de Maracaibo or COLM). The principal objective of the study was to provide a seismic zonation of the area of interest, including an evaluation of the possible remedial measures which could be applied, if necessary, to ensure the stability of the protection system under earthquake loading conditions.

The area known as the COLM is an oil-producing region consisting essentially of three principal production fields: from north to south they are called Tia Juana, Lagunillas and Bachaquero (Figure 1). Oil production first commenced in the region more than 50 years ago and today, the area provides approximately 60% of the total Venezuelan crude output. However, the extraction of petroleum from the shallow reservoirs has given rise to problems of surface subsidence in the major areas of production, in many cases to such an extent that the areas are now situated below lake level. In order to avoid flooding of populated centres and areas where oil installations have been constructed, the construction of a coastal dyke protection system was initiated along the lake edge in the areas most affected by subsidence (Abi Saab and Murria, 1985). Obviously, as production continued, so also has the magnitude and extent of the area affected by subsidence increased.

At first, the small dykes were constructed with little or no control in terms of the foundation or fill materials. Later, based on the seismotectonic characteristics of the area, it became apparent that, due to the continued rates of subsidence, some higher levels of engineering control were necessary. Furthermore, due to advances in the development of soil dynamics theory and practice, it was also suspected that the foundation soils were potentially susceptible to liquefaction, based on expected levels of ground shaking for the region. Given the importance of the area in terms of crude production and the value of the existing infrastructure, a series of studies were initiated to evaluate the risks associated with a possible dyke failure as a result of liquefaction of the foundation soils (Murria and Abi Saab, 1988).

The studies performed in the three subsidence areas to provide a seismic microzonation and the evaluation of the remedial measures to increase, to an acceptable level, the integrity of the coastal dyke system is discussed in this paper.

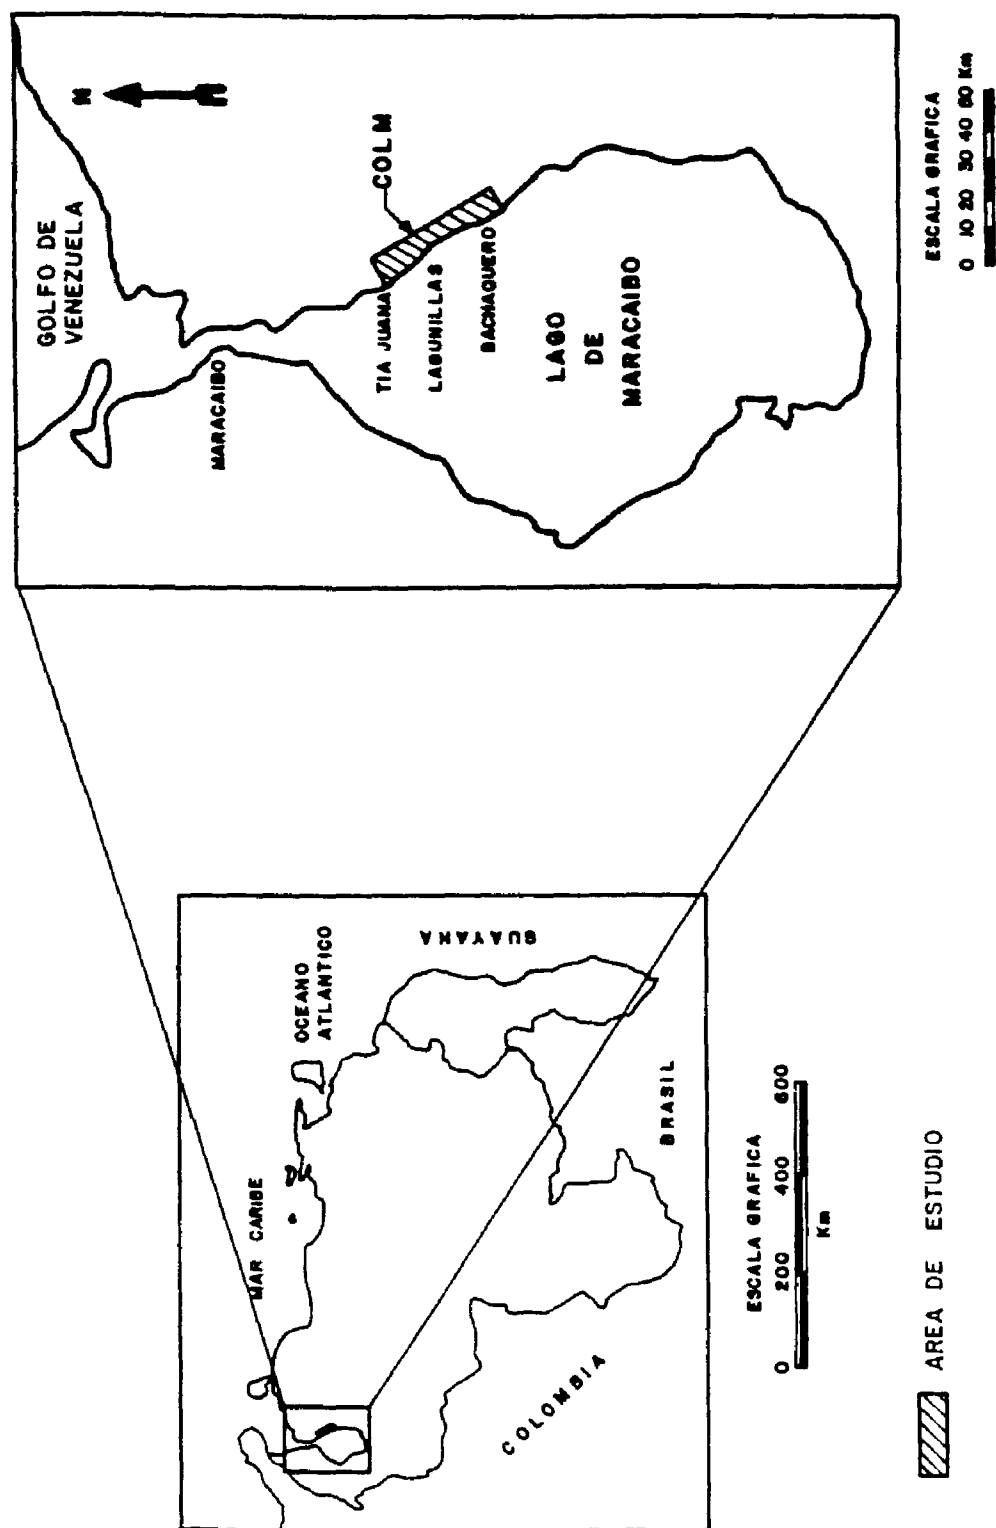


Figure 1: Geographical location of the study area

Studies performed

After having identified the magnitude of the subsidence problem, a major effort was made to improve the dyke design in order to avoid future problems of flooding of the oil installations. This aside, the design of the dyke was based on static concepts with little or no consideration given to the dynamic aspects of the problem. In various opportunities, the susceptibility to liquefaction of the granular foundation soils was evaluated, but with little or no conclusive results being obtained. Partly, this was due to the sparsity of seismic data for the area, which did not allow for a maximum design acceleration to be specified. On the other hand, the granular soils in the area contain important percentages of fine material (up to 40%) and not much published information was available as to the effect of the fine material content on the overall dynamic behaviour of the system. In addition, not much information was available as to the distribution of these soils in the areas of subsidence. As the dykes continued to extend both vertically and laterally (dictated by the development of the subsidence bowl) it became more and more important to evaluate the integrity of the system when subjected to the earthquake forces.

Based on the above, MARAVEN began the process of contracting specific studies aimed at resolving uncertainties in the seismicity of the region and the geotechnical reliability of the dyke-foundation system. At the seismic and geotechnical macrozonation level, the chronological sequence of the work performed can be summarized as:

- a) initial phase of geotechnical borings in order to generate typical soil profiles along the length of the dykes in the three subsidence areas;
- b) definition of the geological and tectonic setting of the region close to the subsidence bowls and evaluation of the seismic sources capable of producing levels of ground shaking that could affect the stability of the dyke-foundation system;
- c) review of available data regarding the historical and instrumental seismicity of the area in order to provide preliminary estimates of the possible range of design accelerations;
- d) installation of a portable microseismic network to evaluate background levels of seismicity;
- e) execution of deep seismic refraction studies along the east coast of the lake to provide a crustal model for the area, with the objective of improving the attenuation law and knowledge of seismicity of the zone;
- f) completion of a second stage of geotechnical studies, including specialized in situ and laboratory testing, to provide a geotechnical characterization of the foundation soils;
- g) testing of scale models in a geotechnical centrifuge for evaluating trends in the dynamic behaviour of the dyke-foundation system and determining possible failure mechanisms in the presence of liquefiable foundation soils;
- h) installation of a permanent seismometer network in the region, providing direct data transmission to an acquisition centre and real time data processing;
- i) installation of an automatic strong-motion accelerometer network;
- j) initiation of a neotectonic study to determine the characteristics of the major faults in the area and evaluate their associated activity;
- k) finalization of the geotechnical characterization with emphasis on the determination of dynamic soil parameters for pre- and post-liquefaction analyses;

The results of all the above studies have been incorporated in the seismic zonation. Recently a pilot study has begun to extend the results obtained so far to the microzonation level; the microzonation level in this case consisting of detailed information at each of the three subsidence areas (approximately 40 km² in extent). The microzonation extends the previous more generalized results and takes into account the effect that the variations of soil profiles may have on the local dynamic response.

The procedures used in the microzonation process for the Tía Juana subsidence area are briefly considered here. Further field and laboratory studies are being performed to reduce the uncertainty in the parameters used for the zonation.

Basis of the microzonation

The microzonation is based on the following geotechnical response conditions:

- a) surface ground accelerations
- b) liquefaction susceptibility of sands, silty sands and silts
- c) pre- and post-earthquake (pseudo-static) slope stability
- d) post-seismic slope deformations
- e) definition of necessary remedial measures for critical dyke sections

The general procedures used in the microzonation, from geotechnical characterization to definition of necessary remedial measures will be discussed briefly in the following sections.

Geotechnical characterization

Based on the previous field and laboratory data, the Tía Juana coastal dyke (a total length of 7 km) was subdivided into 15 geotechnically different profiles, the difference in the first instance being determined on the variation of soil types in the profile. In certain cases, more specific (less general) profiles were included in this preliminary characterization. A typical example of this would be where localized peat or organic clays/silts were present. These types of soils are known to exert considerable influence on the dynamic response. The depth limit for the characterization was between 20 m and 30 m and determined by the availability of data.

The field data used for the characterization included the results of standard penetration tests (SPT), in situ vane tests (FVT), piezocone tests (CPTU) and downhole and crosshole shear wave velocity determinations (DH-XH V_s). Laboratory test data included both classification and strength and deformation parameters (Zalzman et al., 1993).

A typical example of the degree of soil type variability of the Tía Juana polder is shown in Figure 2.

For a given soil profile, the average shear wave velocity, V_s^* , can be calculated if the variation of V_s with depth is known. The average shear wave velocity can then be used to evaluate the fundamental period, T_n , of the soil deposit.

$$V_s^* = (\sum (V_s)_i \cdot H_i) / \sum H_i \quad (1)$$

$$T_n = 4H/V_s^* \quad (2)$$

In an area where the thickness of the soil profile is approximately constant (as can be assumed for the COLM area), the dynamic soil response can be characterized by the average shear wave velocity alone, rather than the fundamental period of the profile. This was the initial criterion used to determine 'similar-type response' profiles in the area. Since the soil response is controlled by the soil characteristics, each representative soil profile was also evaluated in terms of the percentage of different soil types in each. As demonstrated by Vucetic and Dobry (1991), modulus degradation can be correlated broadly with soil plasticity and so this was also used as an index parameter for the initial characterization.

In general terms, the dyke foundation soils can be divided into three principal units:

- a) an upper layer of loose to medium dense silty sand and non-plastic silts, 2.5 m to 4.5 m thick
- b) a middle layer of very soft to soft silty clay, occasionally organic, to a depth of approximately 13 m, and
- c) a lower layer of firm to stiff clay, interbedded with dense sand.

In Tía Juana, the soft clay layer contains only very localized peat layers of limited lateral extent and so they are not of primary importance for the microzonation.

At various locations along the dyke, in situ measurements of shear wave velocity by the crosshole technique have been performed. In order to extend this information to other areas where V_s measurements are not available, the data have been correlated with index parameters such as N_{spt} , S_u or q_c (Echezuría and Sully, 1986). Typical relationships derived for COLM data are:

$$G_{max} = (2000 \text{ to } 2300)S_u \quad (3)$$

$$V_s = 77(N_1)^{0.33} \quad (4)$$

Equation (4) is compared with other published relationships in Figure 3.

Definition of input motion

The input motions for the microzonation studies were determined from seismic hazard studies performed in the area. For the Tía Juana region, the variation of maximum bedrock acceleration as a function of return period is shown in Figure 4. From this figure, the value of maximum base acceleration for any useful life and probability of exceedence can be determined (typical values are indicated on the figure). For the COLM coastal dykes, a 3% probability of exceedence in a 100 year expected life has been chosen as the design condition and corresponds to a bedrock acceleration of 0.225 g.

In order to perform the microzonation study, not only the maximum acceleration is required, but also information regarding the duration and frequency content of the generated earthquakes that may affect the area. This information was determined during the initial seismotectonic investigations. Based on these results, a duration of around 20 seconds was selected as representative with epicentral distances of the order of 100 km to 150 km. Both synthetic and real acceleration records were then evaluated to provide input acceleration records representative of both near- and far-field sources.

The depth of application of the basal acceleration was determined from a sensitivity study based on information from deep borings (down to 500 m) previously performed in both Bachaquero and Tía Juana. The variation of the small-strain shear modulus with depth was evaluated from the results of in situ and laboratory resonant column test data. Both lower and upper bound limits were defined. A series of response analyses were then performed to study the effect of the variation of 'bedrock' depth on the surface accelerations and frequency content. Bedrock was defined at depths varying from 150 m to 500 m. The modulation of the selected input motions was then evaluated at a depth of 50 m, these time history records being the output at 50 m depth obtained from each of the response analyses with differing input bedrock depths.

In order to reduce the thickness of the soil profile to be analyzed, the modified 50 m depth records are used as input records for the microzonation study. In this way, the 'new' bedrock depth is assigned at 50 m and only the soil variations of interest in the microzonation study (between the ground surface and 50 m depth) need to be modelled in the analysis. The 50 m record is an unbiased average based on both soil modulus variations and depth to bedrock. The frequency content variation of the different records is also evaluated and selected to represent the average response as a result of the propagation between the depth of application and the 50 m level. The maximum acceleration for the input record (to be applied at 50 m depth below each profile) was determined to be 0.084g for the 3000 year design earthquake condition. Similar studies are to be performed for return periods less than the design value.

Once the 50 m input acceleration time histories had been evaluated, the dynamic response for the representative near-surface (0 m to 50 m) soil profiles was evaluated.

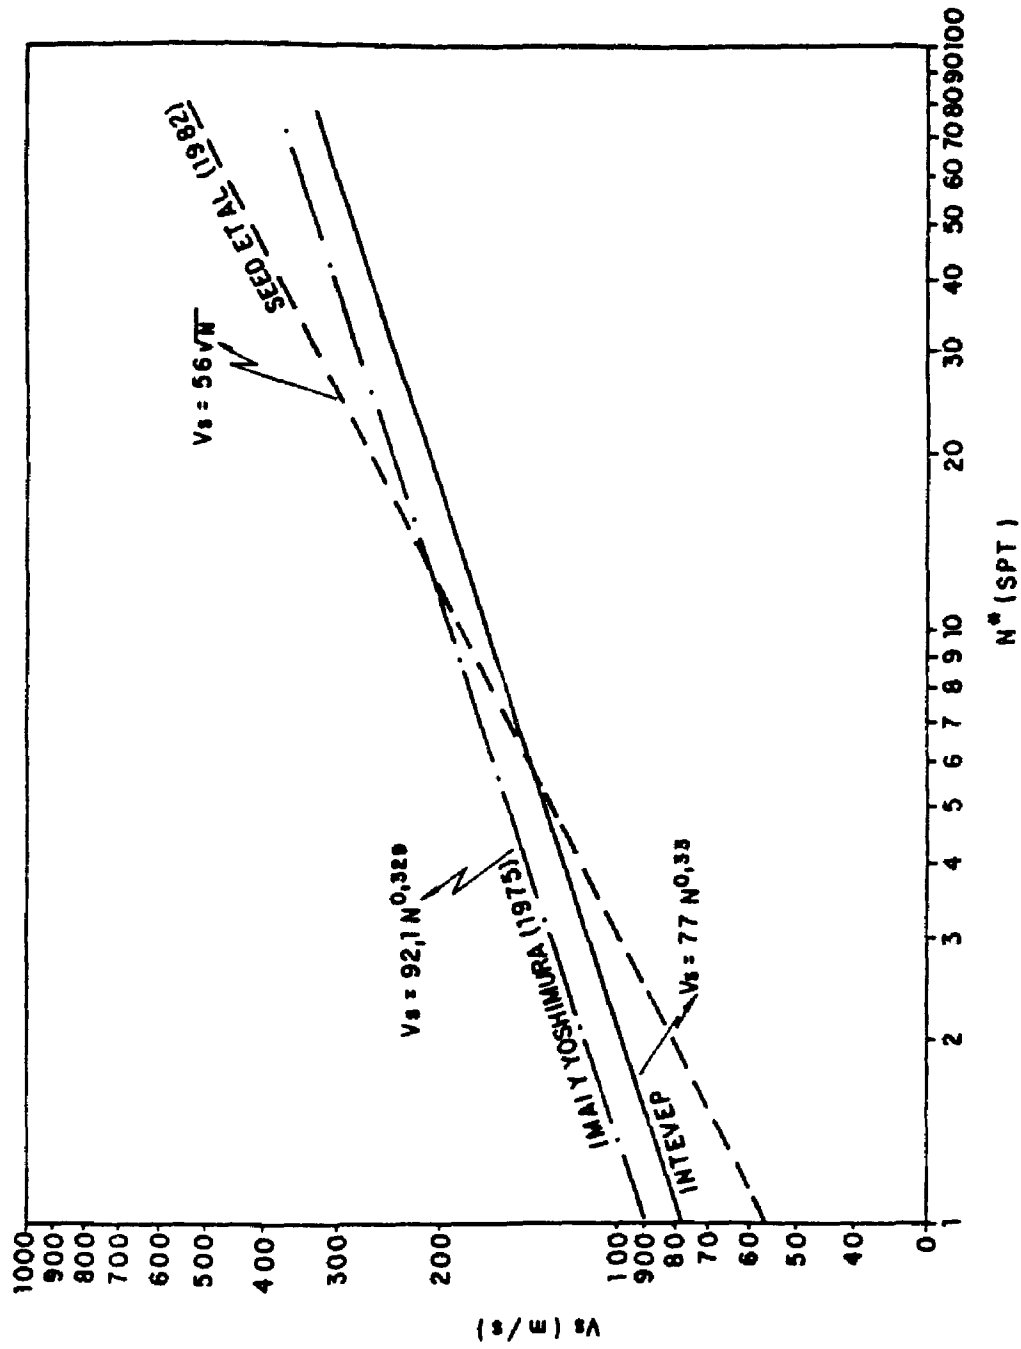


Figure 3: Comparison of published correlations between V_s and $(N^*)_{SPT}$

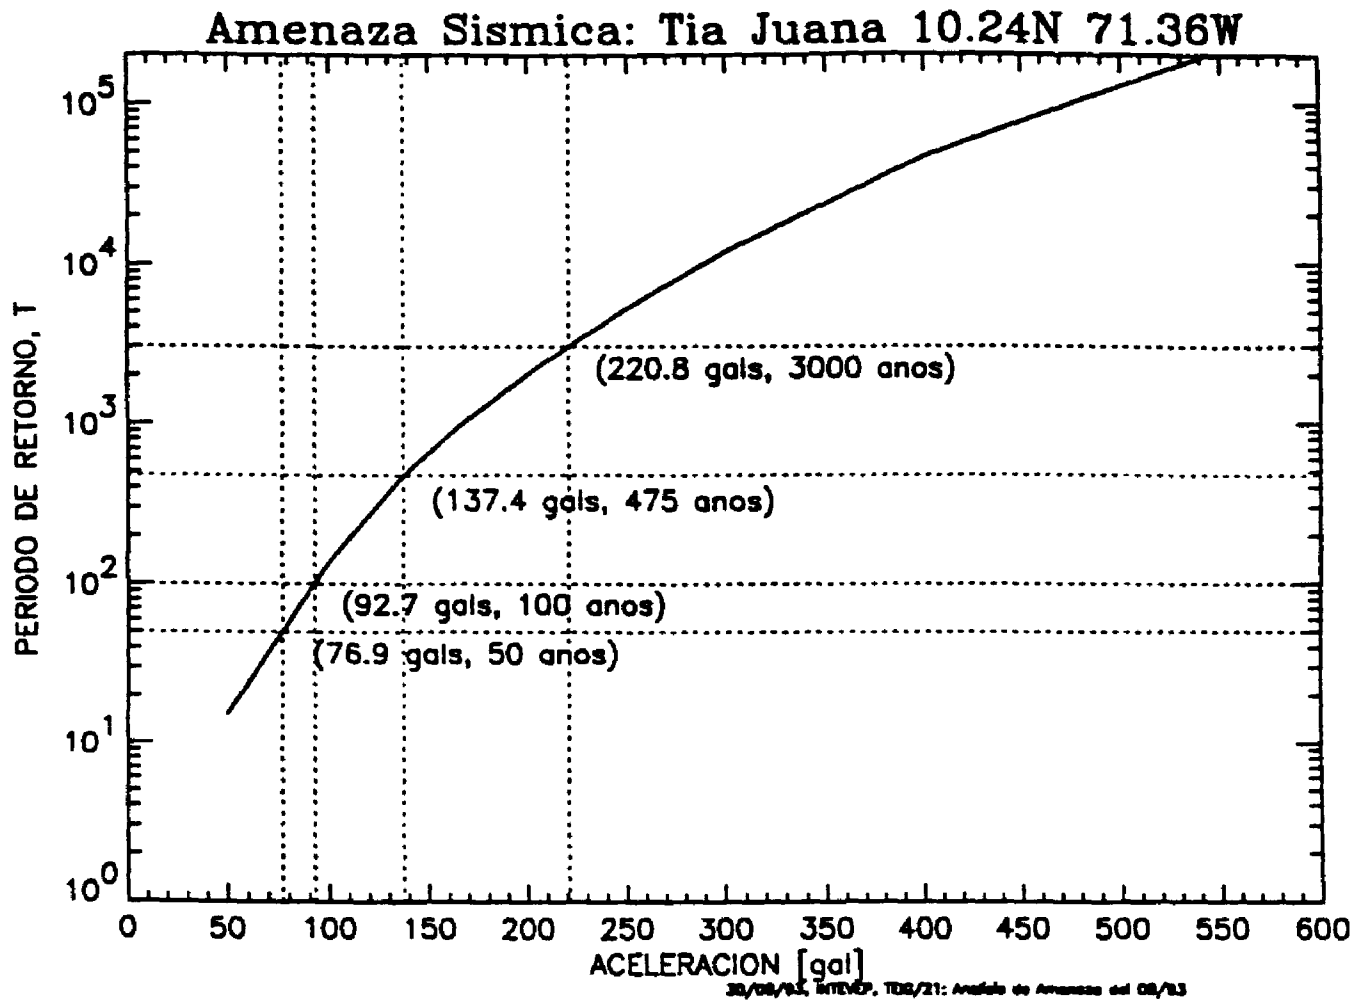


Figure 4: Maximum bedrock acceleration as a function of return period for Tía Juana

Dynamic site response analyses

The site response analyses were performed using the recently modified version, SHAKE91 (Idriss and Sun, 1992), of the well-known program SHAKE (Schnabel et al., 1972). The SHAKE91 program performs an equivalent linear elastic analysis which incorporates modulus reduction according to average strain levels induced by the applied ground motion. The Vucetic and Dobry (1991) degradation curves were used as were the curves for variation in damping ratio (Figure 5). Parametric studies were again used to evaluate the range of response according to variations in the input data and soil properties. Typical variations in the average shear wave velocity in the Tía Juana region, as well as soil type variations for the defined representative soil profiles are shown in Figure 6. As stated earlier, both real and synthetic time histories were used to represent near- and far-field sources. Results obtained from these type of sensitivity analyses have demonstrated the importance of soil type and parameter variations on the response for the COLM soils (Fernández, 1993).

Evaluation of liquefaction potential

According to preliminary results, the majority of the near-surface granular soils in the Tía Juana polder will undergo initial liquefaction. Whether or not the behaviour will be contractive with subsequent strength loss is being presently evaluated by laboratory tests. However, for first phase studies, a residual strength of 1 t/m^2 or a strength ratio, S_{uss}/s_v' , equal to 0.12 (whichever was the largest) was assigned to the liquefied soils for evaluation of pseudo-static stability.

Evaluation of Post-Seismic Deformations

Post-seismic deformation analyses were performed using the computer code DYNARD, developed by Woodward Clyde Consultants, and licensed to MARAVEN/INTEVEP. Additional analyses were also contracted to provide validation of the obtained results using the program TARA-3FL (Finn, 1992).

Definition and Implementation of Remedial Measures

Stability and deformation analyses were performed for each characteristic dyke and foundation system for both pre-and post-seismic conditions. The assumptions and parameters for these static and pseudo-static analyses have been discussed by Sully et al. (1993a). Back analyses of case histories of failures due to liquefaction have been performed to verify the approach and parameters used for both stability (Geoproyectos, 1992) and deformation analyses (Sully et al., 1993b).

When it became apparent that certain sections of the dyke would not meet the stability and deformation criteria established for the dyke-foundation system, an evaluation of alternative types of remedial measure was performed. Initially, the addition of downstream berms was implemented as the most cost-effective approach. In some areas, however, where land restrictions do not permit construction of the downstream berm, more localized ground improvement methods were used; in this case the installation of stone columns. A typical section of a reinforced dyke and foundation profile is presented in Figure 7. In the section, shown, an upstream rip-rap berm has also been added to improve stability in this area and reduce the magnitude of the estimated post-seismic deformations.

Conclusions

The methodology and results of a seismic zonation and later microzonation have been presented with emphasis on the evaluation and remediation of a linear earth structure, critical to the continued oil production in the Lake Maracaibo area of Venezuela. However, the results of this study have also been used for implementing contingency plans and planning the social and economic development of an area of important industrial activity. Although in this instance the results have only been discussed with respect to the coastal dyke system, they can be easily extrapolated to other areas away from the dyke. A detailed geological and

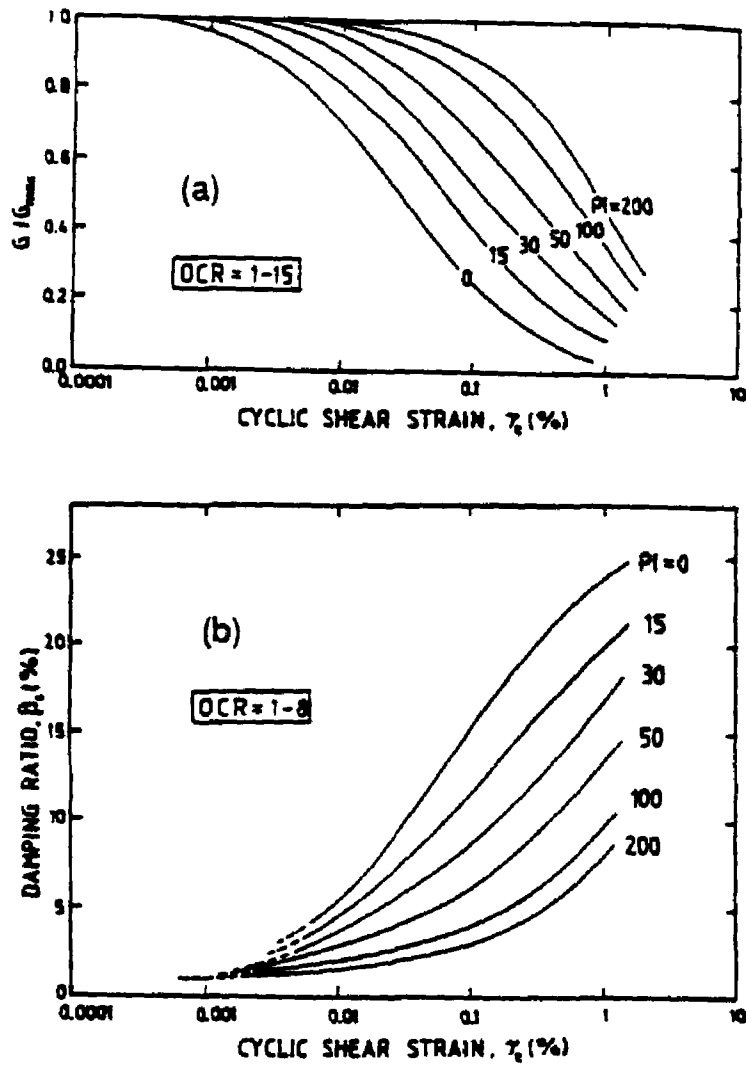


Figure 5: Modulus degradation and damping ratio as a function of cyclic shear strain and plasticity index (after Vucetic and Dobry, 1991)

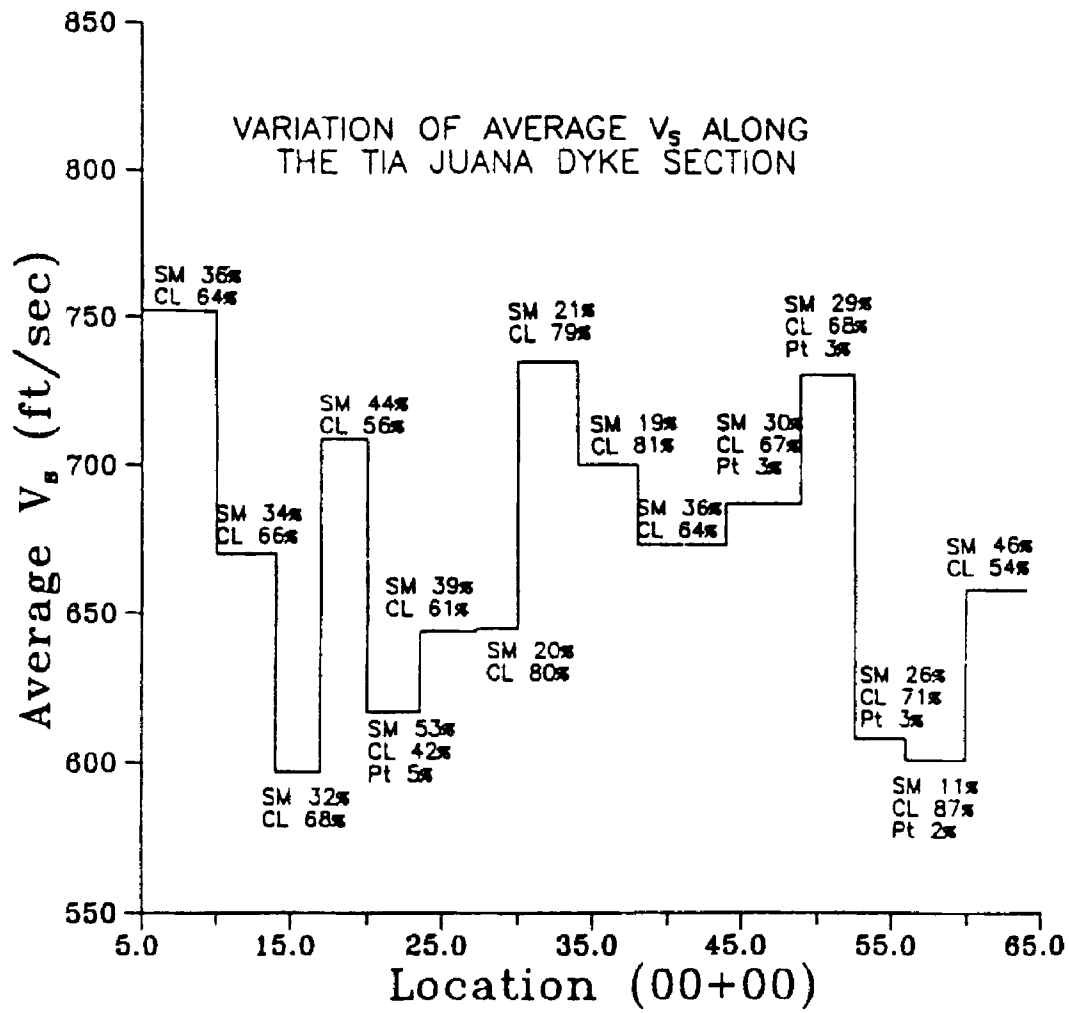


Figure 6: Variation of average V_s for foundation soils along the Tía Juana dyke

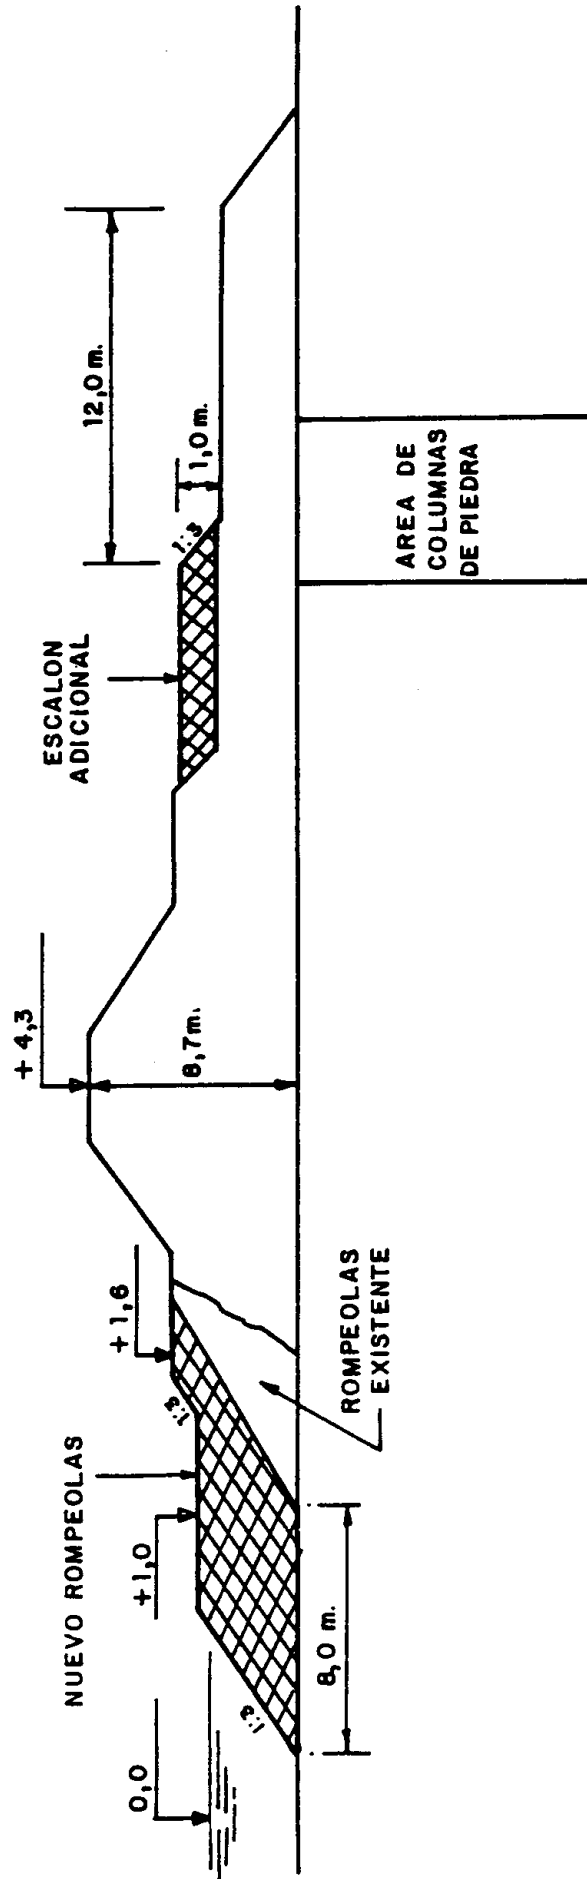


Figure 7: Typical remedial measures implemented for critical dyke sections

geotechnical evaluation is presently underway to consolidate the available information and make it readily accessible (De Santis et al., 1994).

The application of the results obtained has demonstrated the usefulness of the microzonation approach, both for understanding and evaluating the controlling geotechnical and seismotectonic parameters, as well as allowing for the implementation of timely and cost-effective remedial measures. The introduction of microzonation was useful for correctly understanding the possible dynamic response variations due to localized subsoil variations; an important factor in the COLM area where the geological constraints on deposition have given rise to a vertically and laterally variable sequence of soft sediments.

Studies are currently continuing to provide additional data to reduce uncertainties in present knowledge. The permanent strong motion and microseismic networks are also nearing completion and will provide further data for verification of the tectonic model and attenuation law being used. In specific areas of the dyke, local seismic monitoring stations are being installed (accelerometers and piezometers) for calibration of the dynamic response analyses. In addition, the results of the microseismicity study performed by the CETE-FUNVISIS-INTEVEP-MARAVEN group will also provide information that may be used to calibrate the small-strain dynamic response of typical soil profiles.

Acknowledgements

Many people, too numerous to mention, have contributed to both the initial seismic zonation study and the subsequent microzonation. Their contributions and vision are gratefully recognized by the authors. Special thanks to Américo Fernández and Peggy Quijada (INTEVEP) and Bernardo Villegas, Zoni Gil and Salvador Parra (MARAVEN) for their input to this study and to Odalys Morales and Feliciano De Santis, graduate students working on the microzonation project.

References

- Abi Saab, J. and Murria, J. (1985). Origen y desarrollo del sistema de protección costanera, Costa Oriental del Lago Maracaibo. 1. Jornadas de Tecnología de Producción, INTEVEP, Los Teques, Venezuela, 3:1-15.
- De Santis, F., Singer, A. and Sully, J.P. (1993). Caracterización geológica y geotécnica de los sitios test del proyecto de microzonificación sísmica experimental CETE-FUNVISIS-INTEVEP. Paper presented at Microzonation Seminar, Cardón, Venezuela. (unpublished).
- Echezuría, H. and Sully, J.P. (1986). Discussion of the geotechnical properties and liquefaction potential of the COLM dyke foundation soils. Informe Técnico (Confidencial) INTEVEP, S.A., INT-01662,86, Sept., 142 pp. (unpublished).
- Fernández, A. (1993). Análisis de sensibilidad de la respuesta dinámica de perfiles geotécnicos. Trabajo final de grado, Magister en Ingeniería Civil, Universidad de Simón Bolívar, Caracas, 156 pp. (unpublished).
- Fernández, A. and Sully, J.P. (1992). Estudio de deformaciones por efectos dinámicos en la Sección Piloto de Lagunillas. Informe Técnico INTEVEP, S.A., INT-TEIG -0051, 92, Oct., 42 pp. (unpublished).
- Finn, W.D.L., (1992). Flow deformation analyses - pilot section of Lagunillas dykes. PEACS report to INTEVEP, S.A., August, 20 pp. (unpublished)
- Geoproyectos, C.A. (1992). Datos presentados en la 9 reunión de Comité de Expertos, Lagunillas, marzo. (unpublished).
- Idriss, I.M. and Sun, J. (1992). User's manual for SHAKE91. Center for Geotechnical Modelling, University of California, Davis, 13 pp.
- Muria, J. and Abi Saab, J. (1988). Engineering and construction in areas subjected to subsidence due to oil production. 5th International (FIG) Symposium on Deformation Measurements, Fredericton, N.B., Canada, 367-373.
- Schnabel, P.B., Lysmer, J. and Seed, H.B. (1972). SHAKE: A computer program for earthquake analysis of horizontally layered sites. University of California at Berkeley, Earthquake Engineering Research Center, Report No. EERC 72-12, Dec., 88 pp.

- Sully, J.P., Fernández, A. and Zalzman, S. (1993a) Definition of soil parameters for use with DYNARD for flow deformation analyses. Informe Técnico INTEVEP, S.A. (in preparation).
- Sully, J.P., Fernández, A., Zalzman, S. and González, M. (1993b) Back analysis of two case histories to validate modulus values for liquefied soils for use with DYNARD. Informe Técnico INTEVEP, S.A., INT-TEIG - 0074, 93, agosto, 13 pp.
- Vucetic, M. and Dobry, R. (1991). Effect of soil plasticity on cyclic response. Journal of Geotechnical Engineering, ASCE, 117:1.
- Zalzman, S., Nuñez, M., Sgambatti, J. and Echezuría, H. (1992). Caracterización geotécnica de la fundación de los diques de la COLM. Informe Técnico INTEVEP, S.A.. (in preparation).

Modern Broadband Seismic Instrumentation Techniques

S. Pauly¹ and C.M. Guralp²

1. Digital Technology Association
1330-A Galaxy Way
Concord, CA
USA
2. Guralp Systems
3 Midas House
Aldermaston
Reading, RG7 4QW
United Kingdom

Abstract

Recent advances in electronic component design as well as strong and weak motion transducer design contribute to improved instrument system capabilities. These advances provide increased resolution and dynamic range of collected data, increased system reliability, decreased data contamination from external noise sources, and decreased cost. As a result, the contribution which seismic instrumentation can make toward reduction of earthquake risk has been enhanced.

Current acquisition systems using 16-bit digitizers achieve 96 dB peak-to-peak dynamic range and 90 dB (2^{15}) resolution. Peak-to-peak dynamic range of modern sensors can be as high as 130 to 150 dB (2^{22} to 2^{25}). Therefore, either dual low- and high-gain 16-bit outputs and dual data channels or gain-ranging schemes are required to capture the complete dynamic range of such sensors. Recent improvements in 24-bit ADC technology eliminate the need for dual-gain or gain-ranging approaches and expand resolution to 2^{23} . Expansion of sensor/digitizer peak-to-peak dynamic range and resolution to 24 bits means that strong and weak motion (at about the USGS High Noise Model level) can be transduced and quantized with a single system and weak motion events can be analyzed in the absence of (less frequent) strong motion events. Powerful low power DSP (digital signal processor) chips enable simultaneous multi-channel triggered or continuous acquisition, control of the ADC, translation of data to user-required formats, parameter control, interface to a laptop PC, and interface to dial-up or continuous digital radio, telephone, or hardwire telemetry. The improved sensor and digitizer specifications improve data quality and enhance the analysis of results.

Recent sensor and feedback circuit designs provide improved linearity, especially at long period. This is important if the original data are integrated. Inclusion of the digitizer in the sensor housing improves reliability, reduces noise, lowers cost, and minimizes complexity of system responsivity and transfer functions.

We describe instruments which combine the sensor, digitizer, and data recording techniques referenced.

Low Cost PC-based Instruments for Real Time Monitoring and Analysis of Low Speed Data

**Lloyd L. Lynch
Seismic Research Unit
The University of the West Indies
St. Augustine, Trinidad**

Abstract

We have developed a software package which can emulate several instruments on a PC equipped with a special data acquisition adapter. The instruments that can be emulated include:

- a) an Oscilloscope with data logging, playback and analysis facilities;
- b) a Storage Spectrum Analyzer with playback and analysis facilities;
- c) a Multichannel Status Monitor and Data Logger

The package runs on most PC configurations and may, therefore, be used on some portable systems in the field. It has been tested and used in a variety of engineering and scientific applications such as: telemetry signal equalization and trouble shooting, transducer and system parameter analysis and calibration, vibration monitoring, and remote sensing and data acquisition. A variety of transducers may be directly interfaced to the system. To expand its versatility, other sensors may be interfaced through relatively simple signal conditioners thus making the package a worthwhile acquisition for any hazard monitoring and/or emergency preparedness agencies.

A general overview of the package will be presented along with some examples of its applications.

**The Eastern Caribbean Seismograph Network: Telemetry,
Data Acquisition and Processing Systems.**

Lloyd L. Lynch, William B. Ambeh,
Mitra Bridgemohan and Joan L. Latchman
Seismic Research Unit
The University of the West Indies
St. Augustine, Trinidad

Abstract

The Seismic Research Unit operates a medium sized radio-telemetered seismograph network in the Commonwealth island territories of the Eastern Caribbean. This network consists of approximately 32 seismograph stations, which are remotely located at selected sites along the 1000 km long chain of islands. Analogue seismic data from these stations are transmitted in real time via a network of VHF and leased microwave links, to the Unit's headquarters in St. Augustine, Trinidad.

In Trinidad this data is monitored with a PC-based data acquisition system. Further analysis and processing of the data is accomplished using a series of software modules specially designed by the Unit. Also included among these modules are systems to carry out housekeeping and other routine tasks such as bulletin preparation and data archiving. These programs are all run on PCs.

The main objectives of the Seismic Research Unit are:

- (i) to study the distribution and frequency of earthquakes occurring in the Eastern Caribbean in order to specify the levels of hazard and risk appropriate for each country;
- (ii) to maintain a volcano surveillance and warning system in the islands with potentially dangerous volcanoes and to assess the volcanic hazard and risk in these islands.

The main operations and activities at the Unit are designed around these objectives. Considering the size of the network and the modest budget with which the Unit operates, it is necessary to overcome several practical obstacles in order to discharge its responsibilities.

A general overview of the major systems employed at the unit will be presented. Also to be discussed are the strategies that are used to maintain the overall operations of the unit, despite financial and other limitations.